


## 1. Product drawing

/	min	max
Φ	13.9	14.4
A	49.9	50.4
C	9.0	9.4
F	5.0	5.4
G	1.2	1.7

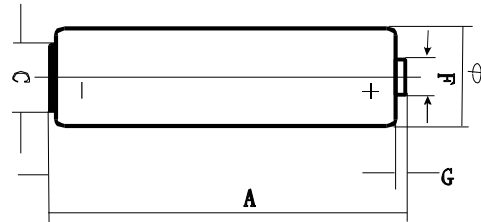

## 2. Scope:

This specification is applicable to ULTRA alkaline cell, LR6 distributed under brandname RAVER.

## 3. Law & Regulation Compliances:

This product complies with EU's battery directive (2006/66/EC).

Packaging materials comply with EU's directive on packaging materials and waste (94/62/EC)

## 4. General:

### 4.1 Type designation

IEC/ JIS	LR6
ANSI	15A
Common	AA

### 4.2 Chemical system: Zn/KOH-H<sub>2</sub>O/MnO<sub>2</sub>

### 4.3 Nominal voltage: 1.5 V

### 4.4 Weight: Approximate 23 g

4.5 Dimension: The dimensions shall be in accordance with the below figures both prior to and after service output test. Measuring equipment shall be with an accuracy  $\pm 0.05\text{mm}$  at least.

4.6 Capacity: Approximate 2900mAh (10mA, 24h/d,  $20\pm 2^\circ\text{C}$ , e.v.= 0.8V)

4.7 Operation temperature :  $-20^\circ\text{C} \sim 60^\circ\text{C}$

Recommend storage temperature : Not exceed  $30^\circ\text{C}$

## 5. Appearance

The battery visually inspected by unaided eye 30cm away from battery. The battery shall be free from dents, scratch, rust and extruded internal compounds, such as sealing compounds and etc, and serious displacement of artwork. Appearance defects shall not be observed that may adversely affect actual use or performance of batteries.

## 6. Electrical Characteristics

Unless otherwise stated, all measurements are to be performed at a Standard Environment of  $20 \pm 2^\circ\text{C}$ ;  $55 \pm 20\%$  RH.

All samples are normalized for 8 hours at least at the above environment prior to measurement.

The digital voltmeter (DCM) is with the precision of 1mV (internal resistance not less than 1 Megohm). The load resistance of the total circuit is accurate within  $\pm 0.5\%$  of the specified value.



**6.1 Open circuit voltage and closed circuit voltage (Load resistance 3.9Ω, 0.3S)**

		<b>OCV(V)</b>	<b>CCV(V)</b>	<b>S.C.(A) (reference)</b>
Initial	Min	1.57	1.40	7.5
	Normal	1.60	1.45	9.0
Stored 1 year	Min	1.55	1.37	5.5
	Normal	1.57	1.40	7.0

**6.2 Service output**

Load	10Ω	1000mA	1.5w/ 0.65w	1000mA	3.3Ω	250mA	3.9Ω	100mA	24Ω	43Ω	
Test mode	24h/d	24h/d	2s/28s 5min/h	10s/m 1h/d	4m/h 8h/d	1h/d	1h/d	1h/d	15s/m 8h/d	4h/d	
End voltage	<b>0.9V</b>	<b>0.9V</b>	<b>1.05V</b>	<b>0.9V</b>	<b>0.9V</b>	<b>0.9V</b>	<b>0.8V</b>	<b>0.9V</b>	<b>1.0V</b>	<b>0.9V</b>	
Unit	h	m	pulse	pulse	m	h	h	h	h	h	
Applications	Reference	Reference	Digital camera	Photo flash	Portable lighting	CD/ Electronic games	Motor/ toy	Digital audio	Remote control	Radio/ Clock	
Initial	MAD	18.5	38.0	55	380	300	7.0	7.0	21.0	42.0	89.0
	Normal	19.5	50.0	70	450	320	7.8	7.5	22.5	45.0	91.5
Stored 1 year	MAD	18.2	30.0	45	300	280	6.7	6.7	20.5	41.0	87.0
	Normal	18.8	40.0	60	360	300	7.2	7.2	21.5	43.0	89.0

m: minute h: hour d: day

Remark:

1) The initial discharge test shall commence within 30 days of manufacture. During stored period, the cells shall be stored under room temperature conditions.

2) Lot release service output test is conducted by 10 Ω continuous discharging to 0.9volts

- The batteries shall not leak during the service life test before the end voltage reached.

## **7. Leakage Resistance**

### 7.1 Over discharge leakage test

Test conditions: 20±2°C & RH 60±15%, 10 Ω continuous discharge 48h.

Number of test samples: 9 batteries

Requirement: No visible leakage; No explosion.

### 7.2 High temperature leakage test

Test conditions: store 20 days under 60±2°C, then store 4~24h under standard environment.

Number of test samples: 24 batteries

Requirement: No visible leakage; No explosion.



## **8. Security Characteristics**

### 8.1 User Drop Test

This test simulates the situation when a battery is accidentally dropped.

Test conditions: Undischarged test batteries shall be dropped from a height of 1 m onto a concrete surface. Each test battery shall be dropped six times, twice in each of the three axes. The test batteries shall be stored for 1 h afterwards.

Number of test sets: 5 batteries

Requirement: No fire, No explosion or leakage after 1hour OCV maintenance rate is 95% over

### 8.2 Short-circuit explosion-proof characteristics

This test simulates an external short circuit of a battery during daily handling of batteries.

Test conditions: Positive and negative terminals of an undischarged battery shall be connected directly. The circuit shall be completed for 24 h or until the battery case temperature has returned to ambient. The resistance of the inter-connecting circuitry shall not exceed 0,1  $\Omega$ .

Number of test samples: 5 batteries

Requirement: No fire or explosion; Leakage is allowable.

### 8.3 Incorrect installation

This test simulates incorrect installation of a battery in a series application.

Test conditions: 4 undischarged batteries are used per test. 3 batteries are placed correctly in series; the 4<sup>th</sup> battery is reversed with respect to polarity. The circuit is maintained until venting occurs or the reversed battery temperature has returned to ambient.

Number of test sets: 5 (20 batteries)

Requirement: No fire or explosion; Leakage is allowable.

## **9. Expiry Date Marking:**

9.1 Unless otherwise specified, each battery will carry a manufacturing date code followed by month and year of expiry for export.

9.2 Expiry date is 7 years from the date of manufacture and is stated on the battery jacket/packing..

## **10. Packaging Requirements**

10.1 The total of heavy metal lead, cadmium, mercury, and hexavalent chromium concentration shall not exceed 100 ppm in Packaging materials and printing inks. Ozone depleting substances (ODS) shall not be used in the manufacturing of any packaging.

The printing on each cell label is legible and permanent. Label defects, if any, shall conform to mutually agreed upon limit samples.

10.2 It is recommended that packaging for shipment and sales according to following packaging specification: 4pcs cells in a blister, 10 blisters in a display box, 8 display boxes in a final outer carton.

10.3 Otherwise packaging for shipment and sales shall conform to the mutually agreed to packaging specification of the designated customers.



## 11. Component / Information of Ingredients

Chemical Nature: Alkaline zinc-manganese dioxide batteries

MATERIALS	APPROXIMATE PERCENT OF TOTAL WEIGHT (%)	CAS NO.	MATERIALS	APPROXIMATE PERCENT OF TOTAL WEIGHT (%)	CAS NO.
Manganese Dioxide (MnO <sub>2</sub> )	~40.5	1313-13-9	Brass	~2.3	12597-71-6
Zinc Powder (Zn)	~18.2	7440-66-6	Fe	~15.5	7439-89-6
Water (H <sub>2</sub> O)	~11.2	7732-18-5	Ni-plating	~0.3	7440-02-0
Potassium Hydroxide (KOH)	~6.3	1310-58-3	Bi	~0.005	7440-69-9
Carbon	~2.9	7782-42-5	In	~0.005	7440-74-6

Chart 1. Discharge diagram

